

# NI 6132/6133 Specifications

This document lists the I/O terminal summary and specifications for the NI PXI-6132/6133.

For the most current edition of this document, refer to [ni.com/manuals](http://ni.com/manuals). Refer to the *DAQ Quick Start Guide* for more information about accessing documents on the NI-DAQ CD.



**Note** With NI-DAQmx, National Instruments has revised its terminal names so they are easier to understand and more consistent among NI hardware and software products. The revised terminal names used in this document are usually similar to the names they replace. For a complete list of Traditional NI-DAQ terminal names and their NI-DAQmx equivalents, refer to the *Terminal Name Equivalents* table in the *S Series Help*.

**Table 1.** I/O Terminal Summary

Terminal Name	Terminal Type and Direction	Impedance Input/Output	Protection (Volts) On/Off	Source (mA at V)	Sink (mA at V)	Rise Time (ns)	Bias
AI <0..7>	AI	100 MΩ in parallel with 10 pF	35/25	—	—	—	±16 nA ±35 nA
AI GND	—	—	—	—	—	—	—
D GND	—	—	—	—	—	—	—
+5 V	—	0.1 Ω 0.45 Ω	Short-circuit to ground	1 A	—	—	—
P0.<0..7>	DIO	—	V <sub>CC</sub> + 0.5	13 at (V <sub>CC</sub> - 0.4)	24 at 0.4	1.1	50 kΩ pu
EXTSTROBE*	DO	—	—	3.5 at (V <sub>CC</sub> - 0.4)	5 at 0.4	1.5	50 kΩ pu
PFI 0/ AI START TRIG	DIO	—	V <sub>CC</sub> + 0.5	3.5 at (V <sub>CC</sub> - 0.4)	5 at 0.4	1.5	50 kΩ pu
PFI 1/ AI REF TRIG	DIO	—	V <sub>CC</sub> + 0.5	3.5 at (V <sub>CC</sub> - 0.4)	5 at 0.4	1.5	50 kΩ pu
PFI 2	DIO	—	V <sub>CC</sub> + 0.5	3.5 at (V <sub>CC</sub> - 0.4)	5 at 0.4	1.5	50 kΩ pu

**Table 1.** I/O Terminal Summary (Continued)

Terminal Name	Terminal Type and Direction	Impedance Input/Output	Protection (Volts) On/Off	Source (mA at V)	Sink (mA at V)	Rise Time (ns)	Bias
PFI 3/CTR 1 SOURCE	DIO	—	V <sub>CC</sub> + 0.5	3.5 at (V <sub>CC</sub> – 0.4)	5 at 0.4	1.5	50 kΩ pu
PFI 4/CTR 1 GATE	DIO	—	V <sub>CC</sub> + 0.5	3.5 at (V <sub>CC</sub> – 0.4)	5 at 0.4	1.5	50 kΩ pu
CTR 1 OUT	DO	—	—	3.5 at (V <sub>CC</sub> – 0.4)	5 at 0.4	1.5	50 kΩ pu
PFI 5	DIO	—	V <sub>CC</sub> + 0.5	3.5 at (V <sub>CC</sub> – 0.4)	5 at 0.4	1.5	50 kΩ pu
PFI 6	DIO	—	V <sub>CC</sub> + 0.5	3.5 at (V <sub>CC</sub> – 0.4)	5 at 0.4	1.5	50 kΩ pu
PFI 7/AI SAMP CLK	DIO	—	V <sub>CC</sub> + 0.5	3.5 at (V <sub>CC</sub> – 0.4)	5 at 0.4	1.5	50 kΩ pu
PFI 8/CTR 0 SOURCE	DIO	—	V <sub>CC</sub> + 0.5	3.5 at (V <sub>CC</sub> – 0.4)	5 at 0.4	1.5	50 kΩ pu
PFI 9/CTR 0 GATE	DIO	—	V <sub>CC</sub> + 0.5	3.5 at (V <sub>CC</sub> – 0.4)	5 at 0.4	1.5	50 kΩ pu
CTR 0 OUT	DO	—	—	3.5 at (V <sub>CC</sub> – 0.4)	5 at 0.4	1.5	50 kΩ pu
FREQ OUT	DO	—	—	3.5 at (V <sub>CC</sub> – 0.4)	5 at 0.4	1.5	50 kΩ pu

AI = Analog Input

DIO = Digital Input/Output

DO = Digital Output

pu = pull-up

Note: The tolerance on the 50 kΩ pull-up resistors is large. Actual value might range between 17 kΩ and 100 kΩ.

## Specifications

The following specifications are typical at 25 °C unless otherwise noted.

### Analog Input

#### Input Characteristics

Number of channels

- |              |   |
|--------------|---|
| NI 6132..... | 4 |
| NI 6133..... | 8 |

Type of ADC

- |                 |                      |
|-----------------|----------------------|
| Resolution..... | 14 bits, 1 in 16,384 |
| Pipeline.....   | 0                    |

Sampling rate	
Maximum.....	2.5 MS/s per channel
Minimum .....	No minimum
Input impedance	
AI – to AI GND .....	100 MΩ in parallel with 10 pF
AI + to AI GND .....	100 MΩ in parallel with 10 pF
Input bias current .....	±2 pA typ, ±25 pA max
Input offset current.....	±1 pA typ, ±10 pA max
Input coupling .....	DC
Max working voltage for all analog input channels	
Positive input (AI +) .....	±13 V for all ranges
Negative input (AI –).....	±13 V for all ranges
Overvoltage protection	
(AI +, AI –) .....	±36 V
Input current during overvoltage conditions .....	±20 mA max
Input FIFO size	
NI 6132 .....	16 MS
NI 6133 .....	16 or 32 MS
Data transfers .....	DMA, interrupts, programmed I/O
DMA mode .....	Scatter-gather

## DC Transfer Characteristics

INL .....	±0.6 LSB typ, ±1 LSB max
DNL .....	±0.25 typ, ±0.75 max, no missing codes

## Absolute Accuracy

Nominal Range at Full Scale (V)	Residual Gain Error (ppm of Reading)	Gain Tempco (ppm/°C)	Reference Tempco	Residual Offset Error (ppm of Range)	Offset Tempco (ppm of Range/°C)	INL Error (ppm of Range)	Random Noise, σ (µV rms)	Absolute Accuracy at Full Scale <sup>1</sup> (µV)	Sensitivity <sup>2</sup> (µV)
±10	151	25	5	47	39	122	1080	4660	432.0
±5	176	25	5	40	43	122	546	2440	218.4
±2.5	207	25	5	47	61	122	305	1370	122.0
±1.25	234	25	5	45	78	122	172	740	68.8

AbsoluteAccuracy = Reading · (GainError) + Range · (OffsetError) + NoiseUncertainty

GainError = ResidualAGainError + GainTempco · (TempChangeFromLastInternalCal) + ReferenceTempco · (TempChangeFromLastExternalCal)

OffsetError = ResidualAOOffsetError + OffsetTempco · (TempChangeFromLastInternalCal) + INL\_Error

NoiseUncertainty =  $\frac{\text{RandomNoise} \cdot 3}{\sqrt{100}}$  For a coverage factor of 3 σ and averaging 100 points.

<sup>1</sup> Absolute accuracy at full scale on the analog input channels is determined using the following assumptions:  
 TempChangeFromLastExternalCal = 10 °C  
 TempChangeFromLastInternalCal = 1 °C  
 number\_of\_readings = 100  
 CoverageFactor = 3 σ

For example, on the 10 V range, the absolute accuracy at full scale is as follows:

GainError = 60 ppm + 13 ppm · 1 + 1 ppm · 10

OffsetError = 20 ppm + 21 ppm · 1 + 60 ppm

$$\text{NoiseUncertainty} = \frac{275 \mu\text{V} \cdot 3}{\sqrt{100}} \quad \text{NoiseUncertainty} = 83 \mu\text{V}$$

$$\text{AbsoluteAccuracy} = 10 \text{ V} \cdot (\text{GainError}) + 10 \text{ V} \cdot (\text{OffsetError}) + \text{NoiseUncertainty} \quad \text{AbsoluteAccuracy} = 1920 \mu\text{V}$$

<sup>2</sup> Sensitivity is the smallest voltage change that can be detected. It is a function of noise.

## Dynamic Characteristics

Phase mismatch..... $\pm 2^\circ$  at 1 MHz

**Table 2.** NI 6132/6133 Analog Input Dynamic Characteristics

Input Range	Bandwidth <sup>1</sup> (MHz)	SFDR Typ <sup>2</sup> (dB)	CMRR <sup>3</sup> (dB)	System Noise <sup>4</sup> (LSB <sub>rms</sub> )	Crosstalk <sup>5</sup> (dB)	THD (dB at 10 kHz)
$\pm 10$ V	1.3	95	70	0.78	-74	-101.1
$\pm 5$ V	1.3	95	70	0.79	-74	-102.5
$\pm 2.5$ V	1.25	96	70	0.86	-74	-102.2
$\pm 1.25$ V	1.25	94	70	0.95	-74	-102.1

<sup>1</sup> –3 dB frequency for input amplitude at 10% of the input range (-20 dB)


<sup>2</sup> Measured at 100 kHz with twelfth-order bandpass filter after signal source

<sup>3</sup> DC to 60 Hz

<sup>4</sup> LSB<sub>rms</sub>, including quantization

<sup>5</sup> DC to 100 kHz

# Typical Performance Graphs

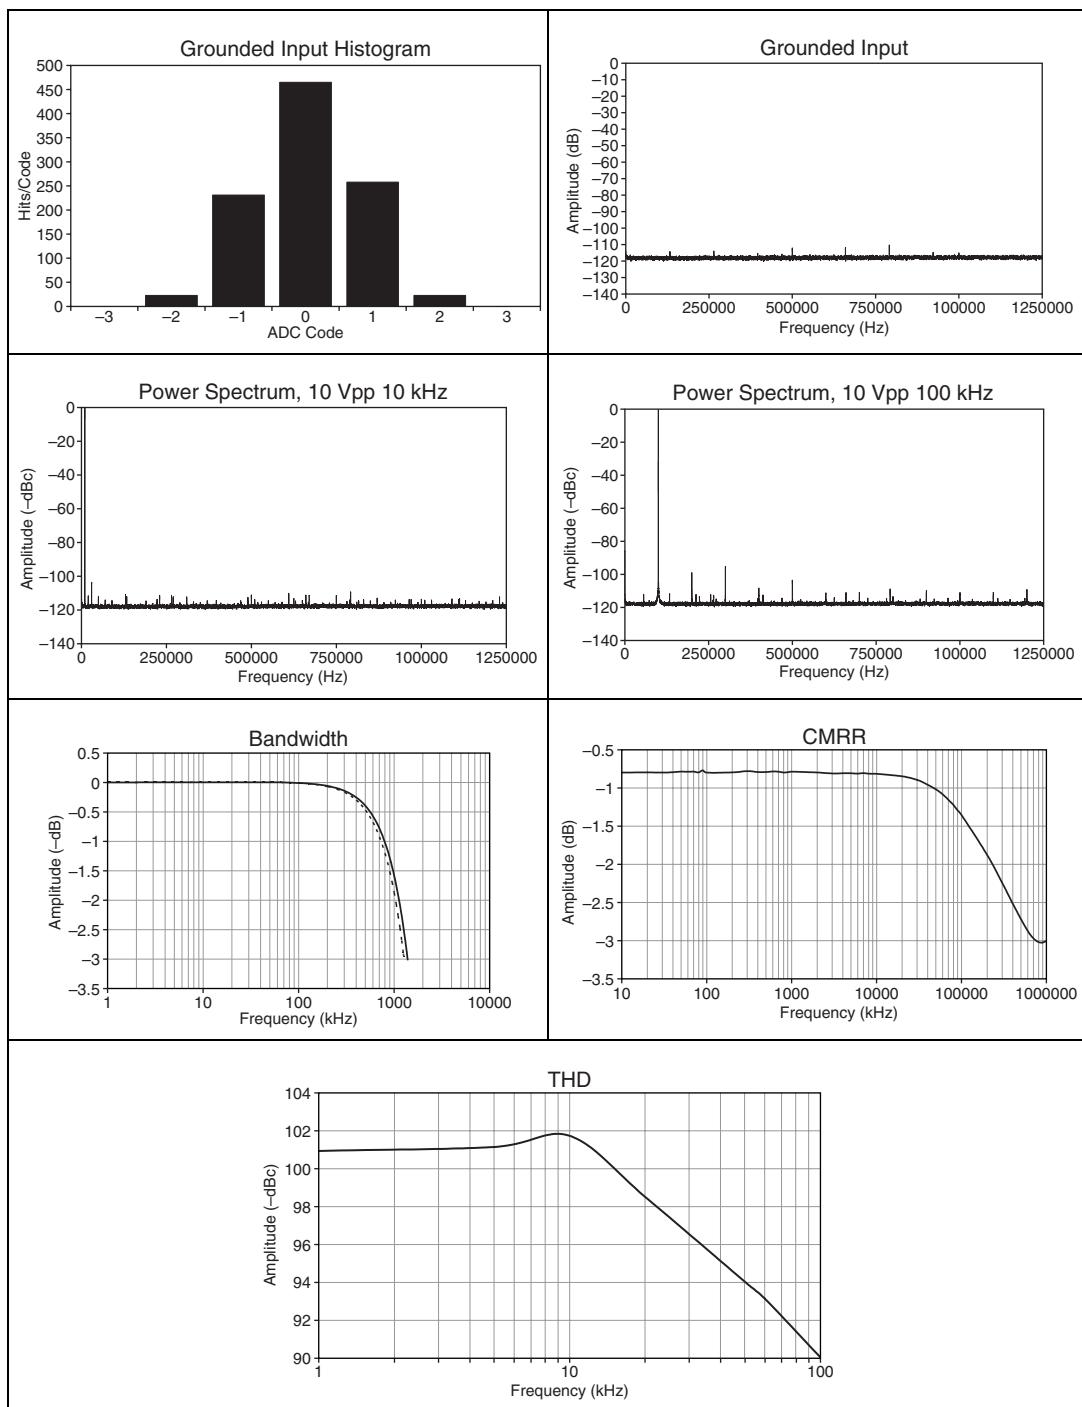

## **Stability**

Recommended warm-up time ..... 15 min

## **Calibration**

Level..... 5.000 V ( $\pm 2.5$  mV)  
(actual value stored in EEPROM)

Temperature coefficient .....  $\pm 5.0$  ppm/ $^{\circ}$ C max

Long-term stability.....  $\pm 15$  ppm/ $\sqrt{1,000}$  h

## **Digital I/O**

Number of channels ..... 8 input/output

Compatibility ..... TTL/CMOS

**Table 3.** Digital Logic Levels

Level	Min	Max
Input low voltage	0.0 V	0.8 V
Input high voltage	2.0 V	5.0 V
Input low current ( $V_{in} = 0$ V)	—	-320 $\mu$ A
Input high current ( $V_{in} = 5$ V)	—	10 $\mu$ A
Output low voltage ( $I_{OL} = 24$ mA)	—	0.4 V
Output high voltage ( $I_{OH} = 13$ mA)	4.35 V	—

Power-on state ..... Input (high-impedance)

Data transfers ..... DMA, interrupts,  
programmed I/O

Input buffer ..... 2,044 bytes

Output buffer ..... 2,044 bytes

Transfer rate (1 word = 8 bits) ..... 10 Mwords/s

## **Timing I/O**

Number of channels ..... 2 up/down counter/timers,  
1 frequency scaler

Resolution	
Counter/timers .....	24 bits
Frequency scaler.....	4 bits
Compatibility .....	TTL/CMOS
Base clocks available	
Counter/timers .....	20 MHz, 100 kHz
Frequency scaler.....	10 MHz, 100 kHz
Base clock accuracy.....	$\pm 0.01\%$
Max source frequency.....	20 MHz
Min source pulse duration .....	10 ns, edge-detect mode
Min gate pulse duration .....	10 ns, edge-detect mode
Data transfers .....	DMA, interrupts, programmed I/O
DMA modes .....	Scatter-gather

## Triggers

### Analog Trigger

Source .....	All analog input channels
Level .....	$\pm$ full-scale
Slope .....	Positive or negative (software-selectable)
Resolution.....	8 bits, 1 in 256
Hysteresis.....	Programmable
Bandwidth (-3 dB) .....	5 MHz internal/external

### Digital Trigger

Compatibility .....	TTL
Response .....	Rising or falling edge
Pulse width .....	10 ns min

## **PXI Trigger Bus**

Trigger lines <0..6>..... 7

Star trigger..... 1

## **Bus Interface**

Type ..... Master, slave

## **Power Requirement**

+5 VDC ( $\pm 5\%$ )

NI 6132 ..... 2.2 A

NI 6133 ..... 3.0 A

+3.3 V ..... 0.8 A

Power available at I/O connector ..... +4.65 to +5.25 VDC at 1 A

## **Physical**

Dimensions

(not including connectors) ..... 16.0 cm by 10.0 cm  
(6.3 in. by 3.9 in.)

I/O connector ..... 68-pin male SCSI-II type

## **Maximum Working Voltage**

Maximum working voltage refers to the signal voltage plus the common-mode voltage.

Channel-to-earth ..... 36 V, Installation Category I

## **Environmental**

Operating temperature ..... 0 to 50 °C

Storage temperature ..... -20 to 70 °C

Humidity ..... 10 to 90% RH, noncondensing

Maximum altitude ..... 2,000 m

Pollution Degree (indoor use only) ..... 2

# Safety

The NI 6132/6133 devices are designed to meet the requirements of the following standards of safety for electrical equipment for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1
- CAN/CSA-C22.2 No. 61010-1



**Note** For UL and other safety certifications, refer to the product label, or visit [ni.com/certification](http://ni.com/certification), search by model number or product line, and click the appropriate link in the Certification column.

# Electromagnetic Compatibility

Emissions .....EN 55011 Class A at 10 m  
FCC Part 15A above 1 GHz

Immunity .....EN 61326:1997 + A2:2001,  
Table 1

EMC/EMI .....CE, C-Tick, and FCC Part 15  
(Class A) Compliant



**Note** For EMC compliance, operate this device with shielded cabling.

# CE Compliance

This product meets the essential requirements of applicable European Directives, as amended for CE marking, as follows:

Low-Voltage Directive (safety).....73/23/EEC

Electromagnetic Compatibility  
Directive (EMC) .....89/336/EEC



**Note** Refer to the Declaration of Conformity (DoC) for this product for any additional regulatory compliance information. To obtain the DoC for this product, visit [ni.com/certification](http://ni.com/certification), search by model number or product line, and click the appropriate link in the Certification column.

National Instruments, NI, ni.com, and LabVIEW are trademarks of National Instruments Corporation. Refer to the *Terms of Use* section on [ni.com/legal](http://ni.com/legal) for more information about National Instruments trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering National Instruments products, refer to the appropriate location: **Help»Patents** in your software, the `patents.txt` file on your CD, or [ni.com/patents](http://ni.com/patents).